


Art.-Nr. 3010

Flachrundsrauben

mit Vierkantansatz und Sechskantmutter

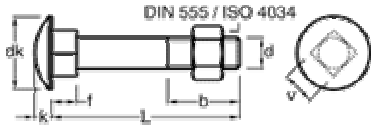

verzinkt-passiviert

DIN	603
ISO	
Festigkeitsklasse	4.6
Zugfestigkeit	
0,2% - Dehngrenze	



d	M 5	M 6	M 8	M 10	M 12	M 16
dk max.	13,55	16,55	20,65	24,65	30,65	38,8
b ¹	16	18	22	26	30	38
b ²	22	24	28	32	36	44
f max.	4,1	4,6	5,6	6,6	8,75	12,9
k max.	3,3	3,88	4,88	5,38	6,95	8,95
v max.	5,48	6,48	8,58	10,58	12,7	16,7
Länge						
16						
20						
25						
30						
35						
40						
45						
50						
55						
60						
65						
70						
80						
90						
100						
110						
120						
130						
140						
150						
160						
180						
200						

b¹ für L = 120 mm

b² für 130 mm = L = 200 mm

Andere Abmessungen auf Anfrage.