


# Art.-Nr. 2120

Zylinderschrauben  
mit Innensechskant, mit Schaft



schwarz

|                   |                            |
|-------------------|----------------------------|
| DIN               | 912                        |
| ISO               | 4762                       |
| Festigkeitsklasse | 8.8                        |
| Zugfestigkeit     | min. 800 N/mm <sup>2</sup> |
| 0,2% - Dehngrenze | min. 640 N/mm <sup>2</sup> |




|       | M 3 | M 4 | M 5 | M 6 | M 8 | M 10 |
|-------|-----|-----|-----|-----|-----|------|
| d     |     |     |     |     |     |      |
| dk    | 5,5 | 7   | 8,5 | 10  | 13  | 16   |
| k     | 3   | 4   | 5   | 6   | 8   | 10   |
| s     | 2,5 | 3   | 4   | 5   | 6   | 8    |
| b     | 18  | 20  | 22  | 24  | 28  | 32   |
| Länge |     |     |     |     |     |      |
| 20    |     |     |     |     |     |      |
| 22    |     |     |     |     |     |      |
| 25    |     |     |     |     |     |      |
| 30    |     |     |     |     |     |      |
| 35    |     |     |     |     |     |      |
| 40    |     |     |     |     |     |      |
| 45    |     |     |     |     |     |      |
| 50    |     |     |     |     |     |      |
| 55    |     |     |     |     |     |      |
| 60    |     |     |     |     |     |      |
| 65    |     |     |     |     |     |      |
| 70    |     |     |     |     |     |      |
| 75    |     |     |     |     |     |      |
| 80    |     |     |     |     |     |      |
| 85    |     |     |     |     |     |      |
| 90    |     |     |     |     |     |      |
| 100   |     |     |     |     |     |      |
| 110   |     |     |     |     |     |      |
| 120   |     |     |     |     |     |      |
| 130   |     |     |     |     |     |      |
| 140   |     |     |     |     |     |      |
| 150   |     |     |     |     |     |      |
| 160   |     |     |     |     |     |      |
| 180   |     |     |     |     |     |      |
| 200   |     |     |     |     |     |      |

Andere Abmessungen auf Anfrage.

# Art.-Nr. 2120

Zylinderschrauben  
mit Innensechskant, mit Schaft

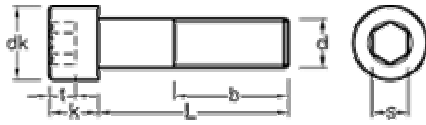

schwarz

|                   |                            |
|-------------------|----------------------------|
| DIN               | 912                        |
| ISO               | 4762                       |
| Festigkeitsklasse | 8.8                        |
| Zugfestigkeit     | min. 800 N/mm <sup>2</sup> |
| 0,2% - Dehngrenze | min. 640 N/mm <sup>2</sup> |



|       | M 12      | M 14      | M 16      | M 18      | M 20      | M 24      |
|-------|-----------|-----------|-----------|-----------|-----------|-----------|
| d     |           |           |           |           |           |           |
| dk    | 18        | 21        | 24        | 27        | 30        | 36        |
| k     | 12        | 14        | 16        | 18        | 20        | 24        |
| s     | 10        | 12        | 14        | 14        | 17        | 19        |
| b     | 36        | 40        | 44        | 48        | 52        | 60        |
| Länge |           |           |           |           |           |           |
| 40    | Available |           |           |           |           |           |
| 45    | Available |           |           |           |           |           |
| 50    |           |           |           |           |           |           |
| 55    | Available | Available |           |           |           |           |
| 60    | Available | Available |           |           |           |           |
| 65    | Available | Available | Available |           |           |           |
| 70    | Available | Available | Available | Available | Available |           |
| 75    | Available | Available | Available | Available | Available |           |
| 80    | Available | Available | Available | Available | Available |           |
| 85    | Available | Available | Available | Available | Available |           |
| 90    | Available | Available | Available | Available | Available | Available |
| 100   | Available | Available | Available | Available | Available | Available |
| 110   | Available | Available | Available | Available | Available | Available |
| 120   | Available | Available | Available | Available | Available | Available |
| 130   | Available | Available | Available | Available | Available | Available |
| 140   | Available | Available | Available | Available | Available | Available |
| 150   | Available | Available | Available | Available | Available | Available |
| 160   | Available | Available | Available | Available | Available | Available |
| 180   | Available | Available | Available | Available | Available | Available |
| 200   | Available | Available | Available | Available | Available | Available |
| 220   |           |           | Available |           |           |           |
| 240   |           |           |           |           |           | Available |

Andere Abmessungen auf Anfrage.