


Art.-Nr. 2110

Zylinderschrauben
mit Innensechskant, ohne Schaft

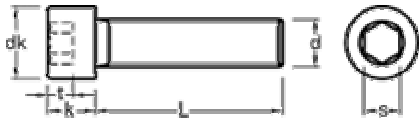

schwarz

DIN	912
ISO	4762
Festigkeitsklasse	8.8
Zugfestigkeit	min. 800 N/mm ²
0,2% - Dehngrenze	min. 640 N/mm ²



d	M 3	M 4	M 5	M 6	M 8	M 10
dk	5,5	7	8,5	10	13	16
k	3	4	5	6	8	10
s	2,5	3	4	5	6	8
Länge						
4	Available	Available	Available	Available	Available	Available
5	Available	Available	Available	Available	Available	Available
6	Available	Available	Available	Available	Available	Available
8	Available	Available	Available	Available	Available	Available
10	Available	Available	Available	Available	Available	Available
12	Available	Available	Available	Available	Available	Available
14	Available	Available	Available	Available	Available	Available
16	Available	Available	Available	Available	Available	Available
18	Available	Available	Available	Available	Available	Available
20	Available	Available	Available	Available	Available	Available
22	Available	Available	Available	Available	Available	Available
25	Available	Available	Available	Available	Available	Available
30	Available	Available	Available	Available	Available	Available
35	Available	Available	Available	Available	Available	Available
40	Available	Available	Available	Available	Available	Available
45	Available	Available	Available	Available	Available	Available
50	Available	Available	Available	Available	Available	Available
55	Available	Available	Available	Available	Available	Available
60	Available	Available	Available	Available	Available	Available
65	Available	Available	Available	Available	Available	Available
70	Available	Available	Available	Available	Available	Available
75	Available	Available	Available	Available	Available	Available
80	Available	Available	Available	Available	Available	Available
90	Available	Available	Available	Available	Available	Available
100	Available	Available	Available	Available	Available	Available

Andere Abmessungen auf Anfrage.

Art.-Nr. 2110

Zylinderschrauben
mit Innensechskant, ohne Schaft



schwarz

DIN	912
ISO	4762
Festigkeitsklasse	8.8
Zugfestigkeit	min. 800 N/mm ²
0,2% - Dehngrenze	min. 640 N/mm ²

GSCHWEND
Industriebedarf

	M 12	M 14	M 16	M 18	M 20	M 24
d	12	14	16	18	20	24
dk	18	21	24	27	30	36
k	12	14	16	18	20	24
s	10	12	14	14	17	19
Länge						
16	■					
18	■					
20	■	■	■			
22	■					
25	■	■	■			
30	■	■	■		■	
35	■	■	■		■	
40	■	■	■	■	■	■
45	■	■	■	■	■	
50	■	■	■	■	■	■
55	■	■	■	■	■	■
60	■	■	■	■	■	■
65	■				■	
70	■	■	■		■	■
80	■		■		■	■
90	■		■			
100	■					

Andere Abmessungen auf Anfrage.