


Art.-Nr. 2150

Zylinderschrauben
mit Innensechskant, ohne Schaft

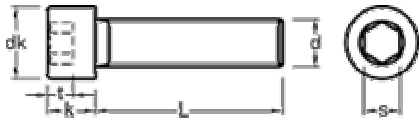

verzinkt-passiviert

DIN	912
ISO	4762
Festigkeitsklasse	8.8
Zugfestigkeit	min. 800 N/mm ²
0,2% - Dehngrenze	min. 640 N/mm ²



d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20
dk	5,5	7	8,5	10	13	16	18	21	24	30
k	3	4	5	6	8	10	12	14	16	20
s	2,5	3	4	5	6	8	10	12	14	17
Länge										
5	Yes	Yes								
6	Yes	Yes	Yes							
8	Yes	Yes	Yes	Yes	Yes					
10	Yes	Yes	Yes	Yes	Yes					
12	Yes	Yes	Yes	Yes	Yes	Yes				
14	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
16	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
18	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
20	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
22		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
25	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
30		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
35		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
40		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
45		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
50		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
55			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
60			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
70			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
80				Yes	Yes	Yes	Yes	Yes	Yes	Yes
100					Yes	Yes	Yes	Yes	Yes	Yes

Andere Abmessungen auf Anfrage.