


Art.-Nr. 4155 / 4160

Kronenmuttern

hohe Form

d bis 10mm

d ab 12mm

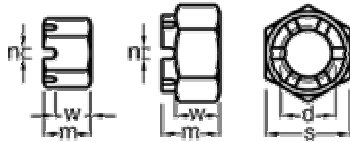

DIN	935
Festigkeitsklasse	8 / 6



d	s max	m max.	w max.	n min.	Splint	4155 blank	4160 verzinkt-passiviert
M 6	10	7,5	5	2,0	1,6 x 14		
M 8	13	9,5	6,5	2,5	2,0 x 16		
M 10	17/16*	12	8	2,8	2,5 x 20		
M 12	19/18*	15	10	3,5	3,2 x 22		
M 14	22/21*	16	11	3,5	3,2 x 25		
M 16	24	19	13	4,5	4,0 x 28		
M 18	27	21	15	4,5	4,0 x 32		
M 20	30	22	16	4,5	4,0 x 36		
M 22	32/34*	26	18	5,5	5,0 x 36		
M 24	36	27	19	5,5	5,0 x 40		
M 27	41	30	22	5,5	5,0 x 45		
M 30	46	33	24	7,0	6,3 x 50		
M 33	50	35	26	7,0	6,3 x 56		
M 36	55	38	29	7,0	6,3 x 63		
M 39	60	40	31	7,0	6,3 x 71		

* Neue SW gemäss ISO 272 (M10, M12, M14, M22)