


# Art.-Nr. 2520

Linsenschrauben  
mit Innensechskant

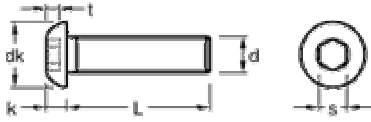

verzinkt-passiviert

ISO	7380
Festigkeitsklasse	10.9
Zugfestigkeit	min. 1000 N/mm <sup>2</sup>
0,2% - Dehngrenze	min. 940 N/mm <sup>2</sup>



	M 3	M 4	M 5	M 6	M 8	M 10	M 12
d							
dk max.	5,7	7,6	9,5	10,5	14	17,5	21
k max.	1,65	2,2	2,75	3,3	4,4	5,5	6,6
s	2	2,5	3	4	5	6	8
t min.	1,04	1,3	1,56	2,08	2,6	3,12	4,16
Länge							
5	Available						
6	Available	Available					
8	Available	Available	Available				
10	Available	Available	Available	Available			
12	Available	Available	Available	Available	Available		
14	Available	Available	Available	Available	Available	Available	
16	Available	Available	Available	Available	Available	Available	Available
18	Available	Available	Available	Available	Available	Available	Available
20	Available	Available	Available	Available	Available	Available	Available
22	Available						
25		Available	Available	Available	Available	Available	Available
30		Available	Available	Available	Available	Available	Available
35		Available	Available	Available	Available	Available	Available
40		Available	Available	Available	Available	Available	Available
45				Available	Available	Available	Available
50				Available	Available	Available	Available
55						Available	Available
60					Available	Available	Available