


Art.-Nr. 2170

Zylinderschrauben
mit Innensechskant, mit Schaft

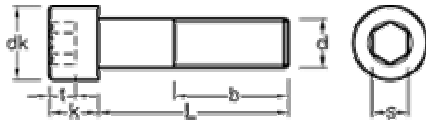

verzinkt-passiviert

DIN	912
ISO	4762
Festigkeitsklasse	8.8
Zugfestigkeit	min. 800 N/mm ²
0,2% - Dehngrenze	min. 640 N/mm ²



	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20
d										
dk	5,5	7	8,5	10	13	16	18	21	24	30
k	3	4	5	6	8	10	12	14	16	20
s	2,5	3	4	5	6	8	10	12	14	17
b	18	20	22	24	28	32	36	40	44	52
Länge										
25	Available	Available								
30	Available	Available	Available	Available						
35		Available	Available	Available	Available					
40	Available	Available	Available	Available	Available	Available				
45		Available	Available	Available	Available	Available				
50		Available	Available	Available	Available	Available	Available			
55		Available	Available	Available	Available	Available	Available	Available		
60		Available	Available	Available	Available	Available	Available	Available	Available	
65			Available	Available	Available	Available	Available	Available	Available	Available
70			Available	Available	Available	Available	Available	Available	Available	Available
75				Available	Available	Available	Available	Available	Available	Available
80		Available	Available	Available	Available	Available	Available	Available	Available	Available
85				Available	Available	Available	Available	Available	Available	Available
90			Available	Available	Available	Available	Available	Available	Available	Available
100		Available	Available	Available	Available	Available	Available	Available	Available	Available
110				Available	Available	Available	Available	Available	Available	Available
120				Available	Available	Available	Available	Available	Available	Available
130					Available	Available	Available	Available	Available	Available
140					Available	Available	Available	Available	Available	Available
150					Available	Available	Available	Available	Available	Available
160						Available	Available	Available	Available	Available
180							Available	Available	Available	Available
200								Available	Available	Available

Andere Abmessungen auf Anfrage.