


# Art.-Nr. 2010

Zylinderschrauben  
mit Innensechskant, ohne Schaft

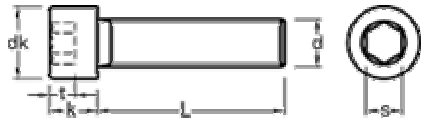

schwarz

DIN	912
ISO	4762
Festigkeitsklasse	12.9
Zugfestigkeit	min. 1200 N/mm <sup>2</sup>
0,2% - Dehngrenze	min. 1080 N/mm <sup>2</sup>




	M 3	M 4	M 5	M 6	M 8	M 10	M 12
d	3	4	5	6	8	10	12
dk	5,5	7	8,5	10	13	16	18
k	3	4	5	6	8	10	12
s	2,5	3	4	5	6	8	10
Länge							
5	Available	Available					
6	Available	Available	Available	Available			
8	Available	Available	Available	Available	Available		
10	Available	Available	Available	Available	Available	Available	
12	Available	Available	Available	Available	Available	Available	
14	Available	Available	Available	Available	Available	Available	Available
16	Available	Available	Available	Available	Available	Available	Available
18	Available	Available	Available	Available	Available	Available	Available
20	Available	Available	Available	Available	Available	Available	Available
22	Available	Available	Available	Available	Available	Available	Available
25	Available	Available	Available	Available	Available	Available	Available
30	Available	Available	Available	Available	Available	Available	Available
35		Available	Available	Available	Available	Available	Available
40		Available	Available	Available	Available	Available	Available
45		Available	Available	Available	Available	Available	Available
50		Available	Available	Available	Available	Available	Available
55		Available	Available	Available	Available	Available	Available
60		Available	Available	Available	Available	Available	Available
70		Available	Available	Available	Available	Available	Available
80		Available	Available	Available	Available	Available	Available
90		Available	Available	Available	Available	Available	Available
100		Available	Available	Available	Available	Available	Available
120		Available	Available	Available	Available	Available	Available

Andere Abmessungen auf Anfrage.

# Art.-Nr. 2010

Zylinderschrauben  
mit Innensechskant, ohne Schaft

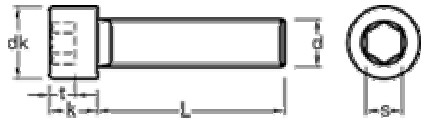

schwarz

DIN	912
ISO	4762
Festigkeitsklasse	12.9
Zugfestigkeit	min. 1200 N/mm <sup>2</sup>
0,2% - Dehngrenze	min. 1080 N/mm <sup>2</sup>



d	M 14	M 16	M 18	M 20	M 22	M 24	M 27	M 30
dk	21	24	27	30	33	36	40	45
k	14	16	18	20	22	24	27	30
s	12	14	14	17	17	19	19	22
Länge								
20	■	■						
22								
25	■	■						
30	■	■	■	■				
35	■	■	■	■				
40	■	■	■	■	■	■		
45	■	■	■	■	■	■		
50	■	■	■	■	■	■	■	■
55	■	■	■	■	■	■		
60	■	■	■	■	■	■	■	■
65				■	■	■		
70		■		■	■	■	■	■
80	■	■		■		■	■	■
90	■	■				■	■	■
100		■	■	■				■

Andere Abmessungen auf Anfrage.